
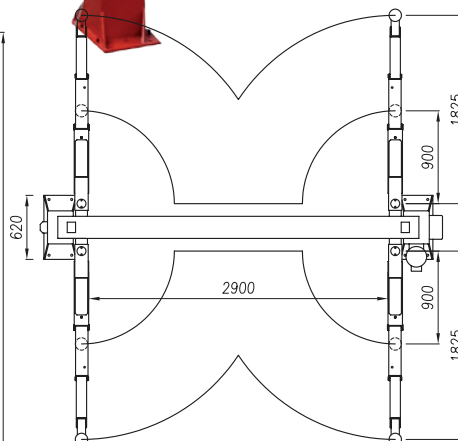


Electro-Hydraulic Two Post Lift

Model: 208L/5L

Capacity: 5,000 kg

- Symmetric lift without base frame for greater space free area at work
- Equipped with two lifting rams which do not require maintenance. Non-bearing cables for perfect synchronisation of the trolleys no matter what distribution weight is loaded
- Designed with 4 extended three-stage arms: ideal for lifting vans and long wheel based vehicles, whilst perfect for standard vehicles
- Overload valve and safety valve in case of hydraulic hose failures
- Slow descent controlled by means of hydraulic valve
- Operation: electro-hydraulic

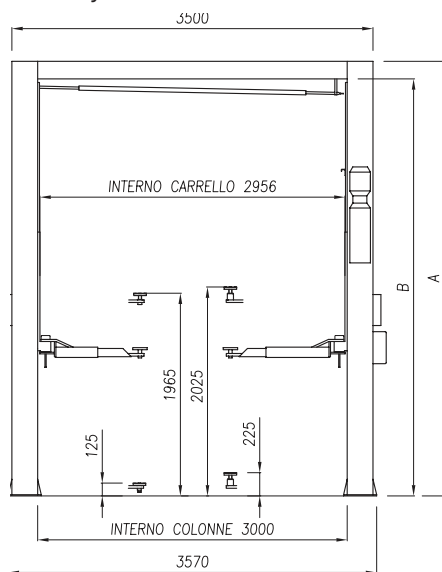

Versione / Version / Version / Version	
208L/5L	208L/5L.4
A 4200 (3600+600)	5100 (3600+1500)
B 4030	4930



Dati tecnici	Technical data	Technische Eigenschaften	Caractéristiques techniques	Datos técnicos	
Portata	Capacity	Tragfähigkeit	Capacité	Capacidad	5.000 kg
Peso	Weight	Gewicht	Poids	Peso	1010/1080 kg
Salita/Discesa	Lifting/lowering	Hub/Senkzeit	Levage/descente	Subida/Bajada	35 s
Altezza di sollevamento	Lifting height	Hubhöhe	Hauteur de levage	Altura de elevación	1965 mm
Motore	Motor	Motorleistung	Puissance moteur	Motor	3 kW - 3 ph 230-400V/50 Hz



FOR MORE INFORMATION, PLEASE CONTACT

1300 694 363

SALES@GENESISEQUIPMENT.COM.AU

UNIT 2 / 67 RADLEY ST, VIRGINIA QLD 4014

0459 505 018

WWW.GENESISEQUIPMENT.COM.AU

PO BOX 435, VIRGINIA BC QLD 4014

WORKSHOP FITOUTS | VEHICLE LIFTS | WORKSHOP EQUIPMENT | SERVICE & PARTS