



SMART LIFT 2.35 SL BMW

Minimum height of only 2890 mm

The data and electric cable that connect the 2 columns can be installed above the columns or in the floor



CE-Stop no disturbing foot guards

THE ORIGINAL NUSSBAUM LIFT


- Flexible height : Ideal for workshops with low ceilings
- Asymmetrical support arms for optimum door clearance
- Suitable for a large range of vehicles
- Distance between the columns of min. 2560 mm
- Short lifting arms swivelling 180°
- Low space requirement



STURDY, RELIABLE AND READY

The SMART LIFT is THE classic Nussbaum lift: it is the result of 40 years experience in the manufacturing of lifts. Featuring a tried and tested design. More than 100,000 units are installed worldwide.

pick up diagrams for:	
BMW	iX1, iX1 Langversion (China), iX2, i4 Gran Coupé, i5, i5 Langversion (China), i7, X1, X1 Langversion (China), X2, X3, X3 Langversion, X4, X5, X6, X7, Z4, 1er, 1er Stufenheck (China), 2er Gran Tourer, 3er Touring, 3er Langversion (China), 4er, 5er, 5er Touring, 6er GT, 7er Langversion, 8er Cabrio, 8er Gran Coupé M
Mini	Countryman
Rolls-Royce	Phantom, Phantom EWB, Cullinan

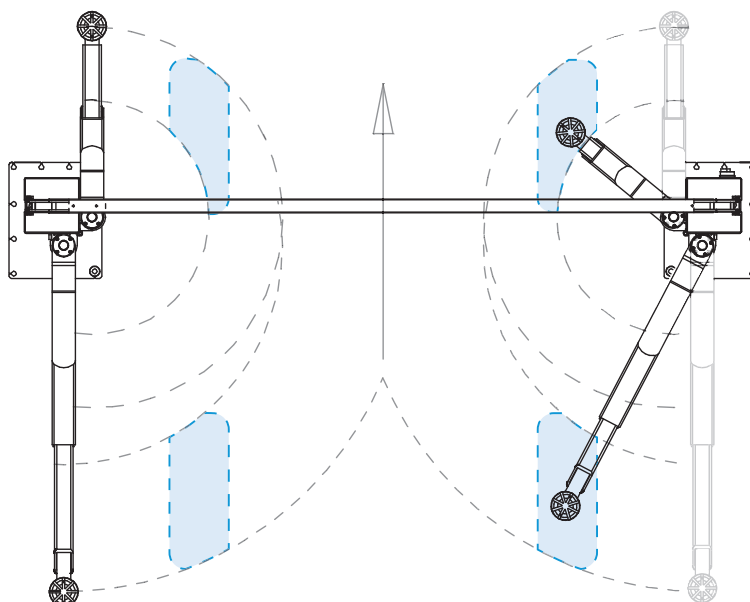

THE RIGHT DATA FOR SUCCESS

Lifting capacity (kg)	3500
Lifting / lowering time approx. (sec)	46 / 40
Lifting height (mm)	2060
Lowest lifting point (mm)	95-140
Total height column (mm)	2890
Top connection (mm)	3685-4170
Total width (mm)	3230
Drive-through width (mm)	2400
Column distance (mm)	2646
Arm-extraction dimensions (mm)	505-823 / 940-1495
Motor (kW)	2x1,5
BMW article number	BMW 69 501 070

